


The Best Solution For Power System

## FEATURES :

CP SERIES

- Compact Design
- Compact Size and Lightweight
- Easy to Use
- EMI/RFI Filter
- Build-in AVR
- Build-in Sealed Lead Acid Battery
- Audible and Visual Indicators
- Computer Interface Port RS232
- High Efficiency
- High Reliability

UPS DIAGRAM

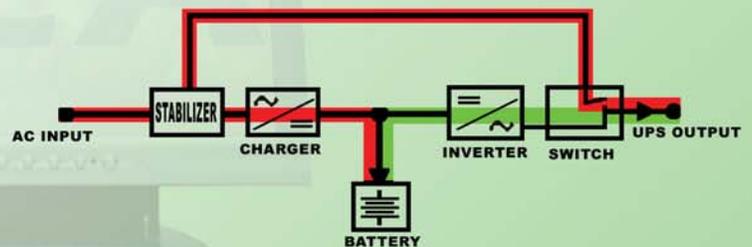

■ AC input voltage present  
■ AC input voltage not present



Protect your computers and sensitive equipments from any electrical disturbance.

# Technical Specification

ITEM		UNITS	SPECIFICATION		REMARKS
MODEL			CP700	CP1400	
CAPACITY		VA / W	700 / 350	1400 / 700	MAXIMUM
AC INPUT	VOLTAGE	V	160 - 250		
	CURRENT	A	1,6	2,9	MAX. LOAD & CHARGER
	FREQUENCY	Hz	50 ± 3		
	PROTECTION	A	3	5	FUSE
DC INPUT	INTERNAL BATTERY		1 x 12V, 7AH	2 x 12V, 7AH	SEALED LEAD ACID BATTERY
	PROTECTION	A	40		FUSE
INVERTER OUTPUT	WAVE FORM		SYNTHESIZED SINEWAVE		PWM
	VOLTAGE	V	220 ± 5%		
	FREQUENCY	Hz	50 ± 1%		
	EFFICIENCY	%	> 80		
C H G	TYPE		CONSTANT VOLTAGE		
	VOLTAGE	V	13,6	27,2	
	CURRENT	A	1,5		MAXIMUM
TRANSFER TIME		ms	≤ 4		
BACK UP TIME		min	10		NOMINAL LOAD
INDICATOR			LED & BUZZER		
OPERATION TEMPERATURE		°C	0 - 40		
DIMENSION		mm	340 x 86 x 158	375 x 135 x 201	D x W x H
WEIGHT		Kg	7	14	

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

CONTACT PERSON :

481-41C0020-210